




Hot Barrel



Pavilion 10 m²

health, beauty, peace of mind

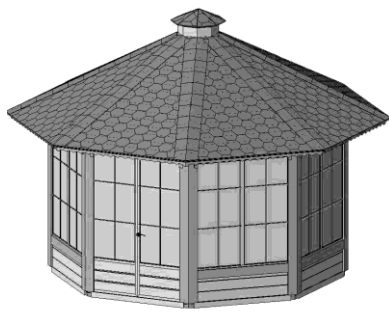

Specifications

Wood	Spruce
Shape	Octagon - 8 corners
Inside area, m²	10
Wall width x height, mm	1440 x 2050
Total height, m	3.30
Diagonal, mm	3763
Wall thickness, mm	45
Floor thickness, mm	28
Roof thickness, mm	18
Number of windows	7
Number of opening windows	3
Weight, kg	1400
Number of persons	8-15
Size of windows, mm	1290 x 1405
Size of doors, mm	1290 x 1800

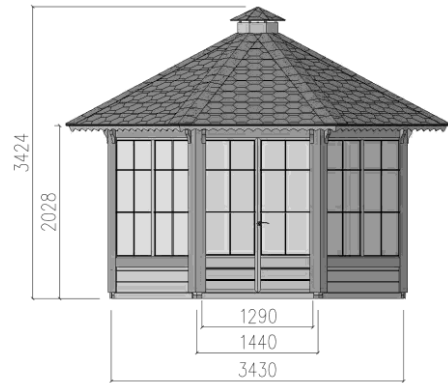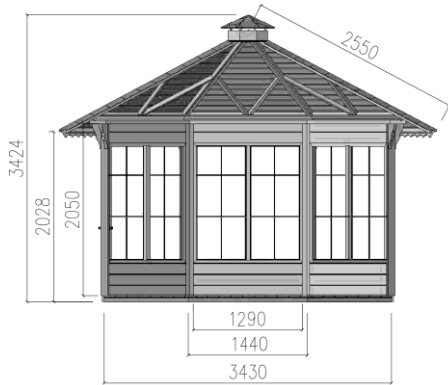

Standard set



- Wall, roof panels;
- Solid floor;
- Roof covered with bitumen shingles of your selected color;
- 7 double glass windows (3 of them are opening);
- Double doors with a lock and windows;
- Ventilation in the roof.

OPTIONS

- Roof shingles' color: red, black, green;
- Possibility to make more opening windows;
- Additional products can be found on page 3.


Windows and doors

Window's size is 1290 x 1405 mm, door's size 1290 x 1800 mm. Double glass units are used; they ensure lower heat transfer to the outside, a lot of light coming inside, and long usage time.

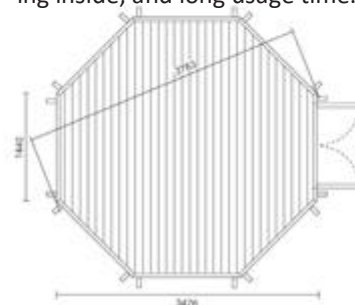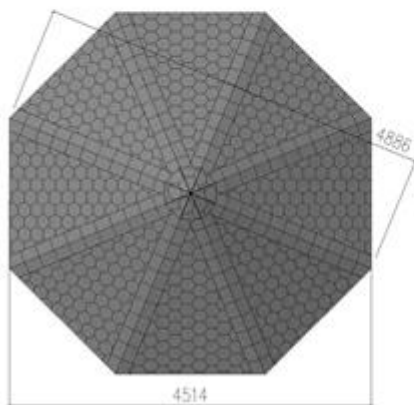


Roof shingles

BITUMEN SHINGLES

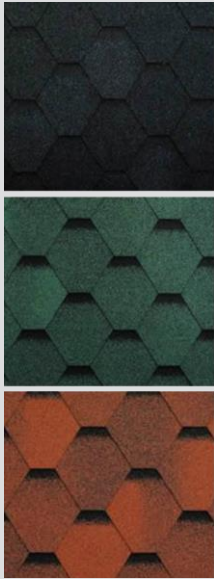

6 layer bitumen shingles are made from a durable and highly resistant fiber glass base coated with the polymer-reinforced bitumen mix which includes a high quality bitumen and an aggregate. The top layer of the shingles is covered with mineral granules ensuring the protection from UV as well as from other weather conditions. The granules are painted using a thermal method, which means that a pigment is burned-in into the surface of granules and this guarantees a long durability of the color. The bottom of the shingles is an adhesive polymer-reinforced bitumen layer protected with an easily removable silicon membrane. Due to the sun heat the overlapped tiles on the top stick to each other thus forming a double hydro-insulating layer which guarantees an excellent leak resistance of the roof. A color of the roof shingles can be chosen from black, green or red. A warranty term for the shingles is 15 years!

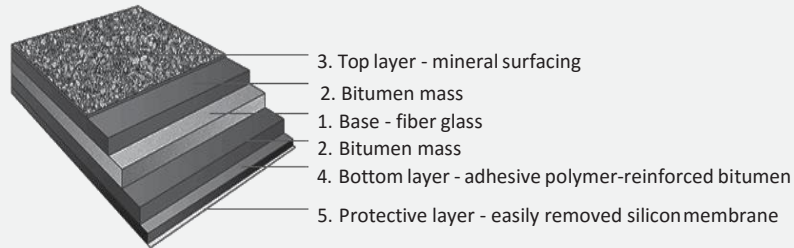

Type of wood

SPRUCE



We mainly use Nordic spruce, which comes from Scandinavia. The light, golden-white softwood radiates a friendly warmth. Every single board used for our Pavilion has its own individual character and history, and this makes our Pavilion a real natural and unique product.

Accessories



flower pot

Flower pot should be placed under the windows. Size of the pot: 107 x 21 x 16 cm.



curtains set

100% linen or cotton;
Dimensions (W x L): 105 x 160 cm;
Available colors:
Linen - white;
Cotton - blue or brown.




stainless steel door sill

It protects the interior front door sills from scratches and dirt.
*This accessory should be ordered together with the product.



Transportation

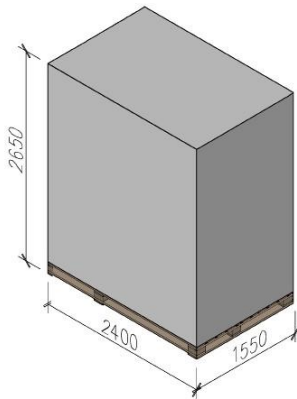


Pavilion KIT

Pavilion is delivered to the customer fully complete, with detailed assembly instructions and drawings, and packed on a pallet (KIT).

Pavilion KIT weight is **1400 kg**.

Foundation

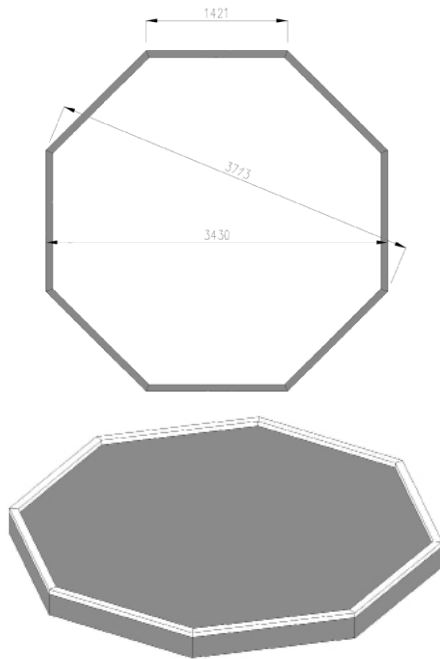

It is very important to have a proper foundation for your pavilion. Therefore we recommend making the foundation according to the sketches here.

First of all, foundation must be prepared according to the landscape and ground conditions. Consult a qualified builder or an engineer to prepare a proper foundation, which fits your location. Make sure to complete the site preparation and the foundation before unpacking and assembling the pavilion.

Maintenance

As wood is a natural material, it can change through time. Cracks of various sizes, changes of the color as well as of a structure of the wood are not the errors, but a feature of wood.

Natural wood (not impregnated) becomes grayish after having been left untouched for a while. Later it can turn blue and get covered with the mold. Therefore, you should immediately impregnate the wood to protect the products.

We strongly recommend that you impregnate the door and windows with a wood impregnation agent both the inside and outside of them, because the doors and

windows can become twisted otherwise. In general, we recommend consulting a specialist regarding the paints suitable for an unprocessed softwood and follow the instructions of paints' manufacturers. Proper painting of the Pavilion will extend its lifetime. Besides that, we suggest you thoroughly inspecting the Pavilion every six months and checking if it needs re-painting or else.

It's NOT advisable to paint the Pavilion walls before assembling it – this is best done when the Pavilion has been already assembled and when the weather is fine. However, if you wish to paint some parts in different colors, this should be done before the Pavilion is assembled.

