

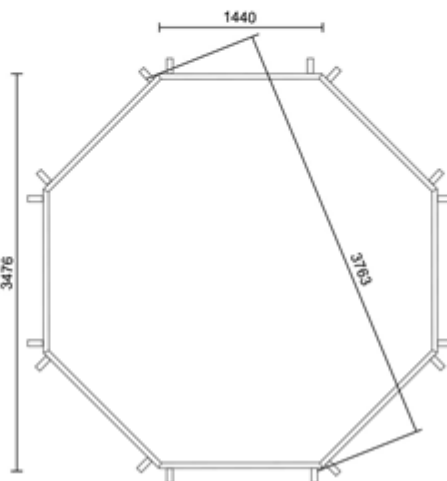
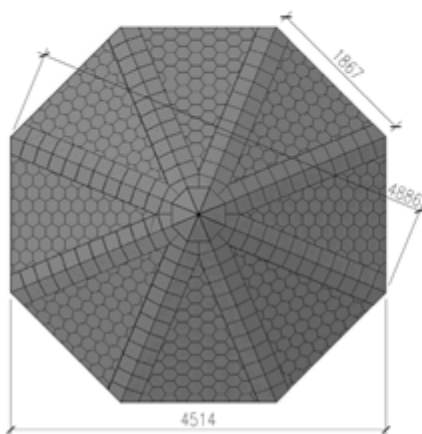
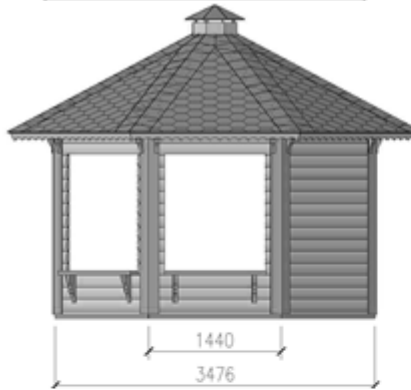
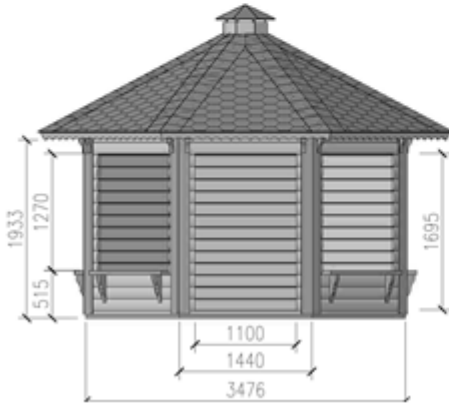


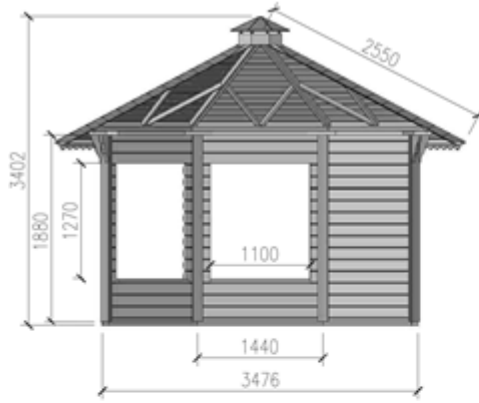

Hot Barrel

Pavilion 9.9 m²
Gazebo

health, beauty, peace of mind

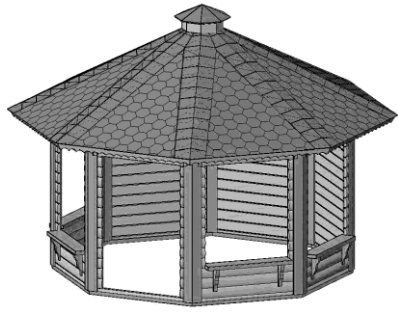

Specifications

Wood	Spruce
Shape	Octagon - 8 corners
Inside area, m²	9.9
Wall width x height, mm	1440 x 1880
Total height, m	3.30
Diagonal, mm	3763
Wall thickness, mm	45
Roof thickness, mm	18
Weight, kg	1100
Number of persons	8-15
Number of open wall panels	4
Number of closed wall panels	3
Size of open wall hole, mm	1100 x 1270

Standard set

- Walls: 3 pcs of closed walls; 4 pcs of open walls; entrance wall;
- Roof covered with bitumen shingles of your selected color;
- Impregnated ground boards.

OPTIONS

- Roof shingles' color: red, black, green;
- Additional products can be found on page 3.




Roof shingles

BITUMEN SHINGLES



6 layer bitumen shingles are made from a durable and highly resistant fiber glass base coated with the polymer-reinforced bitumen mix which includes a high quality bitumen and an aggregate. The top layer of the shingles is covered with mineral granules ensuring the protection from UV as well as from other weather conditions. The granules are painted using a thermal method, which means that a pigment is burned-in into the surface of granules and this guarantees a long durability of the color. The bottom of the shingles is an adhesive polymer-reinforced bitumen layer protected with an easily removable silicon membrane. Due to the sun heat the overlapped tiles on the top stick to each other thus forming a double hydro-insulating layer which guarantees an excellent leak resistance of the roof. A color of the roof shingles can be chosen from black, green or red. A warranty term for the shingles is 15 years!

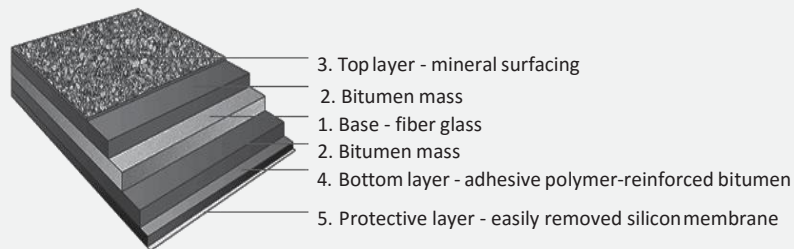

Type of wood

SPPUCE



We mainly use Nordic spruce, which comes from Scandinavia. The light, golden-white softwood radiates a friendly warmth. Every single board used for our Pavilion has its own individual character and history, and this makes our Pavilion a real natural and unique product.

Accessories




flower pot

Flower pot should be placed under the windows. Size of the pot: 107 x 21 x 16 cm.



Transportation

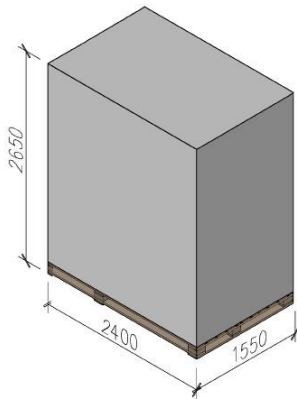


Pavilion KIT

Pavilion is delivered to the customer fully complete, with detailed assembly instructions and drawings, and packed on a pallet (KIT).

Pavilion KIT weight is **1100 kg**.

Foundation

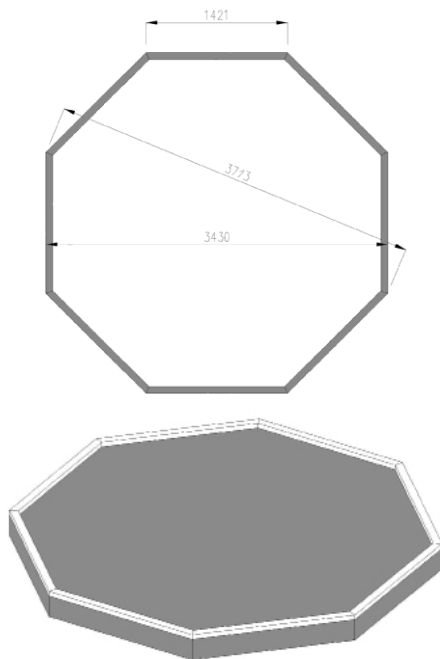

It is very important to have a proper foundation for your pavilion. Therefore we recommend making the foundation according to the sketches here.

First of all, foundation must be prepared according to the landscape and ground conditions. Consult a qualified builder or an engineer to prepare a proper foundation, which fits your location. Make sure to complete the site preparation and the foundation before unpacking and assembling the pavilion.

Maintenance

As wood is a natural material, it can change through time. Cracks of various sizes, changes of the color as well as of a structure of the wood are not the errors, but a feature of wood.

Natural wood (not impregnated) becomes grayish after having been left untouched for a while. Later it can turn blue and get covered with the mold. Therefore, you should immediately impregnate the wood to protect the products.

We strongly recommend that you impregnate Pavilion with a wood impregnation agent both the inside and outside. In general, we recommend consulting a spe-

cialist regarding the paints suitable for an unprocessed softwood and follow the instructions of paints' manufacturers. Proper painting of the Pavilion will extend its lifetime. Besides that, we suggest you thoroughly inspecting the Pavilion every six months and checking if it needs re-painting or else.

It's NOT advisable to paint the Pavilion walls before assembling it – this is best done when the Pavilion has been already assembled and when the weather is fine. However, if you wish to paint some parts in different colors, this should be done before the Pavilion is assembled.

